




















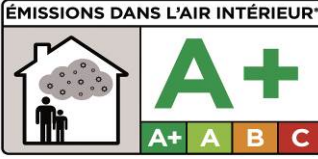


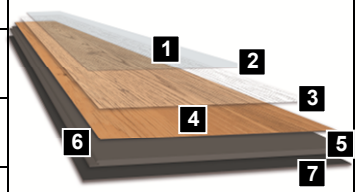


TECHNICAL CHARACTERISTICS

wineo 800			wineo
Heterogeneous resilient-flooring for glueless installation - Covering type according to EN ISO 10582			
	wineo 800 wood	wineo 800 wood XL	wineo 800 stone XL
Format	1212 x 185 mm	1505 x 237 mm	914 x 480 mm
Product thickness	5 mm	5 mm	5 mm
Planks, tiles / m² per box	8 / 1.79 m ²	6 / 2.14 m ²	6 / 2.63 m ²
Boxes / m² per pallet	64 / 114.75 m ²	56 / 119.84 m ²	44 / 115.72 m ²
Guarantee	25 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de		
Classification			Product composition
	Utilization class 23 EN ISO 10874	Heavy-duty use in the domestic area	1 Surface sealing
	Utilization class 33 EN ISO 10874	Heavy-duty use in the commercial sector	2 Surface texture Various embossings
	Utilization class 42 EN ISO 10874	Normal use in the light industrial sector	3 Wear layer Thickness 0.55 mm
	Wear layer binder content EN ISO 10582	Type I	4 Decor Decor film
	R10 Anti slip category DIN 51130	R 10	5 Base layer with glass fibre reinforced
	Staining and chemical resistance EN ISO 26987	Good resistance according to the concentration and residence time	6 Profile connection Connect Technology 
	Light fastness EN ISO 105-B02	Light fastness (method 2) ≥ 6	7 Backing
	Residual indentation EN ISO 24343-1	≤ 0.1 mm	Insulation mat silentCOMFORT (separately available)
	Castor chair test ISO 4918	25000 revolutions no damage with rolls type W	stone - real joint technology selected decors
	Thermal resistance EN 12667	~ 0.021 (m ² K)/W ~ 0.031 (m ² K)/W in combination with silentCOMFORT	
	Impact sound reduction EN ISO 16251-1	~ 7 dB up to 14 dB in combination with silentCOMFORT	
	Dimension stability EN ISO 23999	~ 0.1 %	
	Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203	 tested for emissions, harmful substances PREMIUM
 <p>Windmüller GmbH Nord-West-Ring 21 D-32832 Augustdorf</p> <p>DOP: 0301010 EN 14041:2004 / AC2006 1658</p> <p>- 18 -</p>      <p>www.wineo.de</p>		 <p>ÉMISSIONS DANS L'AIR INTÉRIEUR</p> <p>A+</p> <p>A+ A B C</p> <p>Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)</p>	
 <p>Phthalate free</p>		 <p>factory made coated</p>	



Relevant information:

- R 10 Decor „Heavy Metal“ excluded.
- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.